





**HJT Bifacial
Glass Glass**

**30
Years**

Linear Power GUARANTEED


2-30 Years Decay Less Than 0.25% Annually On Average

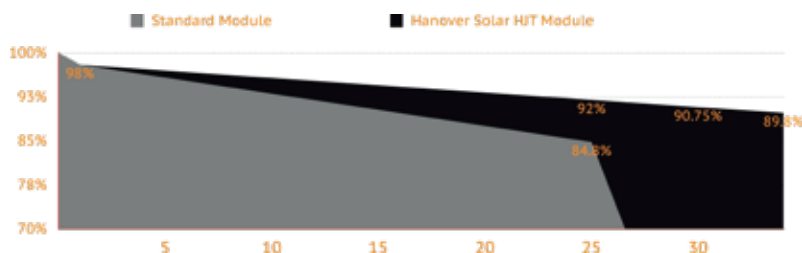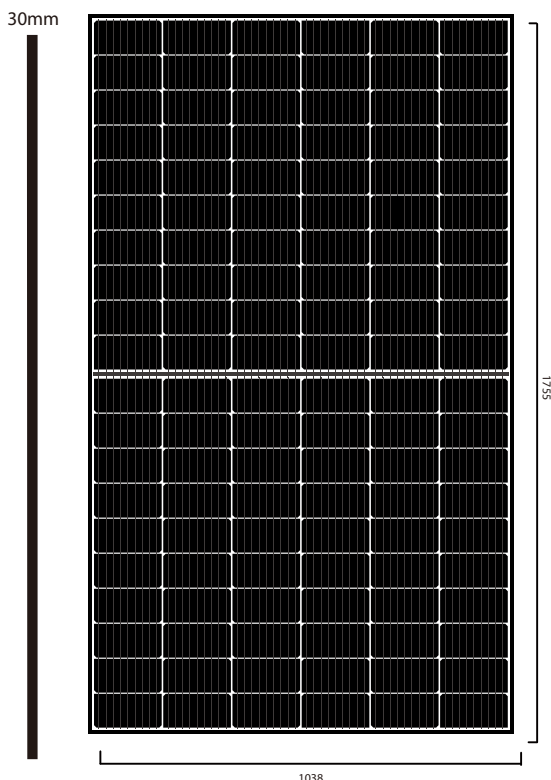

Mechanical Characteristics

| | |
|---------------------------|--|
| Solar Cell Quantity | HJT 166 x 83 mm 120 pcs (6 x 20) |
| Dimensions | 1755 x 1038 x 30 mm |
| Glass | High Transmission Tempered Glass |
| Frame | Anodized Aluminium Alloy 30mm |
| Backsheet | Transparent Glass |
| Junction Box | TÜV Certified IP67 |
| Series Fuse Rating | 20A x 3 diodes |
| Maximum System Voltage | 1500V DC |
| Max.Wind Load /Snow Load | 2400/5400 |
| Output Cables | 300 mm / 4.0 mm ² |
| Test Standard Condition | AM=1.5 E=1000/ m ² TC=20°C |
| NOCT | 45°C +/- 2°C |
| Bifaciality | 85 +/- 5% |
| Temperature Coefficients: | Pmax -0.24%/K Voc -0.22%/K; Isc 0.047%/K |

I-V Curve

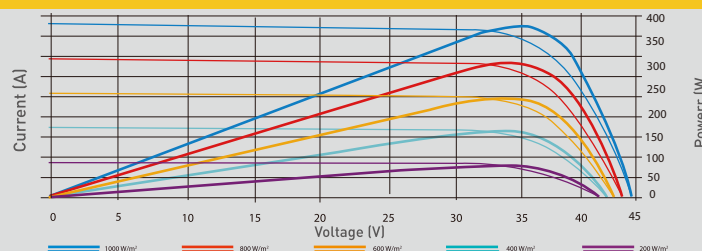

Electrical Characteristics

| Item no. | Pmax | Vmp | Imp | Voc | Isc | Mod. % |
|-----------------|------|-------|--------|--------|--------|--------|
| HS400M-60-166GP | 400W | 38.43 | 10.41A | 45.45V | 11.13A | 21.68% |

Packaging Configuration

| PACKAGE | 40'HQ Container | PALLET | |
|---------|-----------------|--------|----------------|
| PCS | 949 PCS | 35 PCS | Weight 22.8 kg |

CAUTION: read the installation instruction before using the product.

©2021 Hanover Solar B.V All rights reserved, The specification included in this datasheet are subject to change without notice.

HANOVER NEW ENERGY PTY LTD
7 Koorabel Place
Baulkham Hills NSW 2153
AUSTRALIA
+61 (0) 881 215 838



HANOVER SOLAR GmbH
Herrenstrasse 13
D30159 Hannover
GERMANY
+49 (0) 511 711 090 0539

HANOVER SOLAR BV
Vierlingweg 39A
Bergen op Zoom 4612PN
NETHERLANDS
+31(0) 165 203 842